

# Cable-Extension Position Transducer

**RS232 Data Communication**  
**Ranges: 0-600 to 0-1700 inches**  
**Industrial Grade**

<Extended Range>

# PT9232



## Specification Summary:

### GENERAL

Full Stroke Ranges ..... 0-600 to 0-1700 inches  
 Electrical Interface ..... RS232  
 Format ..... HEX  
 Accuracy .....  $\pm 0.10\%$  full stroke  
 Repeatability .....  $\pm 0.02\%$  full stroke  
 Resolution .....  $\pm 0.003\%$  full stroke  
 Measuring Cable ..... stainless steel *see ordering information*  
 Enclosure Material ..... powder-painted aluminum or stainless steel  
 Sensor ..... plastic-hybrid precision potentiometer  
 Potentiometer Cycle Life ..... 250,000 cycles *before signal degradation may occur*  
 Maximum Retraction Acceleration ..... *see ordering information*  
 Maximum Velocity ..... *see ordering information*  
 Weight, Aluminum (Stainless Steel) Enclosure ..... 8 lbs. (16 lbs.), max.


### ELECTRICAL

Input Voltage ..... 9...22 VDC  
 Input Current ..... 40 mA  
 Baud Rate ..... 9600 (selectable to 38.4K)

### ENVIRONMENTAL

Environmental Suitability ..... NEMA 4X/6, IP 67  
 Operating Temperature .....  $-40^{\circ}$  to  $200^{\circ}$ F ( $-40^{\circ}$  to  $90^{\circ}$ C)  
 Vibration ..... up to 10 G's to 2000 Hz maximum


### Outline Drawing

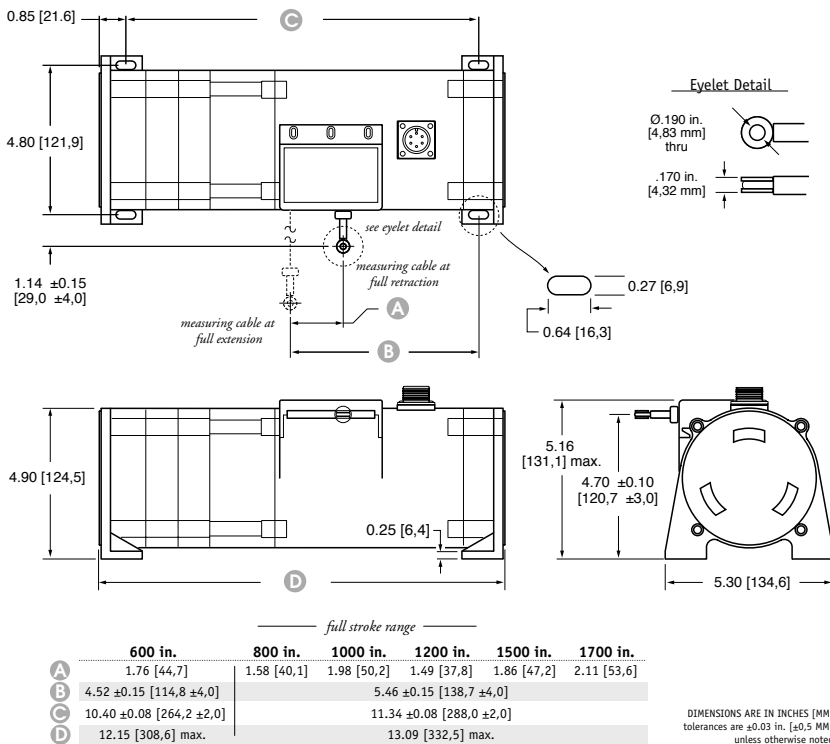

The PT9232 delivers position feedback via RS232 serial communication to your data acquisition or controller system. The PT9232 sends a raw 16-bit count from 0000H to FFFFH. Additionally this device can be set to continuously send data or send data only when polled.

As the internal position sensing element is a precision potentiometer, this transducer maintains current accurate position even during power loss and does not need to be reset to a "home" position.

### Output Signal

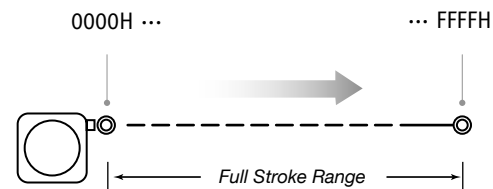


CeleSCO Transducer Products, Inc.  
 20630 Plummer Street • Chatsworth, CA 91311  
 tel: 800.423.5483 • +1.818.701.2750 • fax: +1.818.701.2799

**celesco**  
 celesco.com • info@celesco.com


**I/O Format:**

**Data Format**

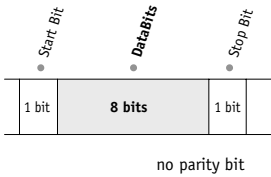

**Data Frame**

6 byte Hex string:



\*-see below

**Important!** All communications to/from the transducer are in **HEX!**

**User Commands:**

Description	User Command				Sensor Response			
	<CMD>	<B <sub>0</sub> >	<B <sub>1</sub> >	<B <sub>2</sub> >	<CMD>	<B <sub>0</sub> >	<B <sub>1</sub> >	<B <sub>2</sub> >
Get Sensor Info	0x05	0x00	0x00	0x00	0x05	version <sup>(4)</sup>	date <sup>(5)</sup>	date <sup>(5)</sup>
Get Serial Number	0x15	0x00	0x00	0x00	0x15	serial number <sup>(3)</sup>		
Start Continuous Data	0x25	0x00	0x00	0x00	0x25	0x00	0x00	0x00
Stop Continuous Data	0x35	0x00	0x00	0x00	0x35	0x00	0x00	0x00
Get Position Data	0x45	0x00	0x00	0x00	0x45	CMC <sup>(1)</sup>	CMC <sup>(1)</sup>	status <sup>(2)</sup>

**(1) CMC - Current Measurement Count (Position)**

The Current Measurement Count (CMC) is the output data that indicates the present position of the measuring cable.

The CMC is a 16-bit value that occupies the first two bytes (B<sub>0</sub> and B<sub>1</sub>) of the data field. B<sub>0</sub> is the MSB (most significant byte) and B<sub>1</sub> is the LSB (least significant byte).

The CMC starts at 0000H with the measuring cable fully retracted and continues upward to the end of the stroke range stopping at FFFFH. This holds true for all ranges.

**(2) Status**

The status byte is used as a flag to indicate the validity of the position signal that the internal electronics receives from the potentiometer.

Flags are as follows:  
0x00 = GREEN, 0x55 = YELLOW, 0xAA = RED

A "green" flag shows everything OK. A "yellow" or "red" flag indicates that the sensor has either been extended beyond its range or that there is a problem with the potentiometer.

**(3) Serial Number**

Each sensor has its own unique serial number. This information can be retrieved by sending the sensor the "Get Serial Number" command.

The serial number is a 3 byte value from which ranges from 0 to 9999999 (decimal).

**(4) Version**

This is a single byte value (0-255 decimal) which indicates the currently installed firmware version of the sensor.

**(5) Date**

This is a 2 byte value showing the date of currently installed firmware. This value ranges from 01011 - 12319 (decimal). Format is MMDDY. While the month and day are expressed as two digit numbers the year is expressed in a single digit only.

Example: 08054 = August 5, 2004


**Baud Rate**

The baud rate can be set using switches 7 & 8 on the 8-pole DIP switch found on the rs232 controller board located inside the transducer.

DIP-7	DIP-8	baud rate
0	0	9600
1	0	19200
0	1	38400
1	1	9600



**RS232 Controller Board and DIP Switch Location**

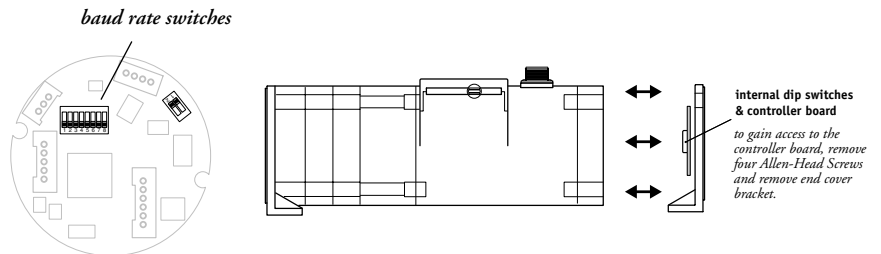

**Ordering Information:**

**Model Number:**

**PT9232** - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_  
*order code:*                      **R**                      **A**                      **B**                      **C**

Sample Model Number:

**PT9232 - 1200 - AL - FR - M6**

- R** range: 1200 inches
- A** enclosure: aluminum
- B** cable exit: front (horizontal)
- C** electrical connection: 6-pin plastic connector

**Full Stroke Range:**

<b>R</b> <i>order code:</i>	<b>600</b>	<b>800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
full stroke range, min:	600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.
cable tension (30%):	25 oz.	25 oz.	24 oz.	24 oz.	23 oz.	23 oz.
measuring cable:	.034-in. dia. nylon-coated stainless	.024-in. dia. nylon-coated stainless	.024-in. dia. nylon-coated stainless	.019-in. dia. nylon-coated stainless	.015-in. dia. non-coated stainless	.015-in. dia. non-coated stainless

**Enclosure Material:**

<b>A</b> <i>order code:</i>	<b>AL</b>	<b>SS</b>
enclosure material:	powder-painted aluminum	303 stainless steel
max. acceleration:	1G	.33G
max. velocity:	60 inches/sec.	20 inches/sec.

**Cable Exit:**

**B** *order code:*

<b>FR</b>	<b>UP</b>	<b>BK</b>	<b>DN</b>
front	top	back	down

**Electrical Connection:**

**C** *order code:*

<b>M6</b>	<b>C25</b>																																			
6-pin plastic connector with mating plug IP 67, NEMA 6, NEMA 4X (stainless enclosure only)	25-ft. instrumentation cable 24 AWG, shielded IP 67, NEMA 6																																			
.30 - .39 in. [8 - 10 mm] cable dia. 16 AWG max conductor size connector: MS3102E-145-6P mating plug: MS3106E-145-6S	25 ft. x 0.2-in. dia. [7,5 M x 5 mm dia.] 24 AWG, shielded																																			
<table border="0"> <tr> <td></td> <td><b>pin</b></td> <td><b>signal</b></td> </tr> <tr> <td>A</td> <td>A</td> <td>9...22 VDC</td> </tr> <tr> <td>B</td> <td>B</td> <td>common</td> </tr> <tr> <td>C</td> <td>C</td> <td>Transmitted Data</td> </tr> <tr> <td>D</td> <td>D</td> <td>Received Data</td> </tr> <tr> <td>E</td> <td>E</td> <td>common</td> </tr> <tr> <td>F</td> <td>F</td> <td>common</td> </tr> </table>		<b>pin</b>	<b>signal</b>	A	A	9...22 VDC	B	B	common	C	C	Transmitted Data	D	D	Received Data	E	E	common	F	F	common	<table border="0"> <tr> <td><b>color code</b></td> <td><b>signal</b></td> </tr> <tr> <td>Red</td> <td>9...22 VDC</td> </tr> <tr> <td>Black</td> <td>common</td> </tr> <tr> <td>White</td> <td>—</td> </tr> <tr> <td>Green</td> <td>Transmitted Data</td> </tr> <tr> <td>Blue</td> <td>Received Data</td> </tr> <tr> <td>Brown</td> <td>common</td> </tr> </table>	<b>color code</b>	<b>signal</b>	Red	9...22 VDC	Black	common	White	—	Green	Transmitted Data	Blue	Received Data	Brown	common
	<b>pin</b>	<b>signal</b>																																		
A	A	9...22 VDC																																		
B	B	common																																		
C	C	Transmitted Data																																		
D	D	Received Data																																		
E	E	common																																		
F	F	common																																		
<b>color code</b>	<b>signal</b>																																			
Red	9...22 VDC																																			
Black	common																																			
White	—																																			
Green	Transmitted Data																																			
Blue	Received Data																																			
Brown	common																																			

version: 1.0 last updated: March 23, 2005